

波纹管截止阀

产品概述 Product overview

波纹管截止阀适用于电站、天然气、水蒸汽、供热、冷冻系统等各种工况的管路上，切断或接通管路介质。

Bellows globe valve is suitable for the power station, natural gas, steam, heating and refrigeration system under various working conditions such as the pipeline, cut off or connect pipe medium.

产品特点 Product features

- 产品结构合理、密封可靠、性能优良、造型美观。
- 密封面堆焊 Co 基硬质合金、耐磨、耐腐、抗摩擦性能好、使用寿命长。
- 阀杆调质及表面氮化处理，有良好的抗腐和抗摩擦性能。
- 阀杆升降位置指示，更直观。
- 零件材料，法兰和对焊尺寸可根据实际工况或用户要求合理选配，满足各种工程需要。
- Price, product rational structure, reliable sealing, excellent performance, beautiful appearance.
- Low sealing surface surfacing welding Co in cemented carbide, wear-resisting, corrosion, pit good friction performance, long service life.
- Quenched and tempered low stem and surface nitriding treatment, has the good corrosion resistance and friction resistance.
- Stem lifting position indicator, more intuitive.
- Low parts material, the size of the flange and butt weld ends can be reasonable selection according to actual working condition or the user requirements, meet the needs of the various kinds of engineering.

产品采用标准 Product Specification

设计标准 Design standard	结构长度 Structural length	连接法兰 Flanged ends	试验和检验 Inspection and test
DIN 3356-82	DIN3202	DIN 2543-2546	DIN 3230-75


产品性能规范 Product performance specification

公称压力 (MPa) Nominal pressure	壳体试验压力 (MPa) Shell test pressure	密封试验压力 (MPa) Seal test pressure	使用温度 (°C) Using the temperature	使用介质 Use medium
1.6	2.4	1.76	-20°C ~350°C	水、蒸汽、油品等 Water, steam, oil, etc
2.5	3.75	2.75		
4.0	6.0	4.4		

主要零部件材质 Main parts material

序号 No.	名称 name	材质 material
1	阀体 body	GS-C25、CF8、CF3
2	阀瓣 disc	F304、F316
3	锁紧螺母 Lock nut	25#、F304、F316
4	阀杆 stem	2Cr13、F304、F316
5	金属垫 Metal pads	石棉 asbestos+ 不锈钢 Stainless steel、PTFE
6	双头螺栓 stud	ASTMA193 B7、A193-B8、A193-B8M
7	螺母 nut	ASTMA193 2H、A193-8、A193-8M
8	填料 packing	柔性石墨 Flexible graphite、PTFE
9	压套 Pressing sleeve	25#、F304、F316
10	压板 Pressure plate	GS-C25、CF8、CF3
11	螺栓 stud	ASTMA193 B7、A193-B8、A193-B8M
12	阀盖 cover	GS-C25、CF8、CF3
13	井帽 Hole cap	25#
14	手轮 handwheel	碳钢 Carbon steel
15	阀杆螺母 Stem nut	ZcuZu25A116Fe3Mn2

波纹管截止阀

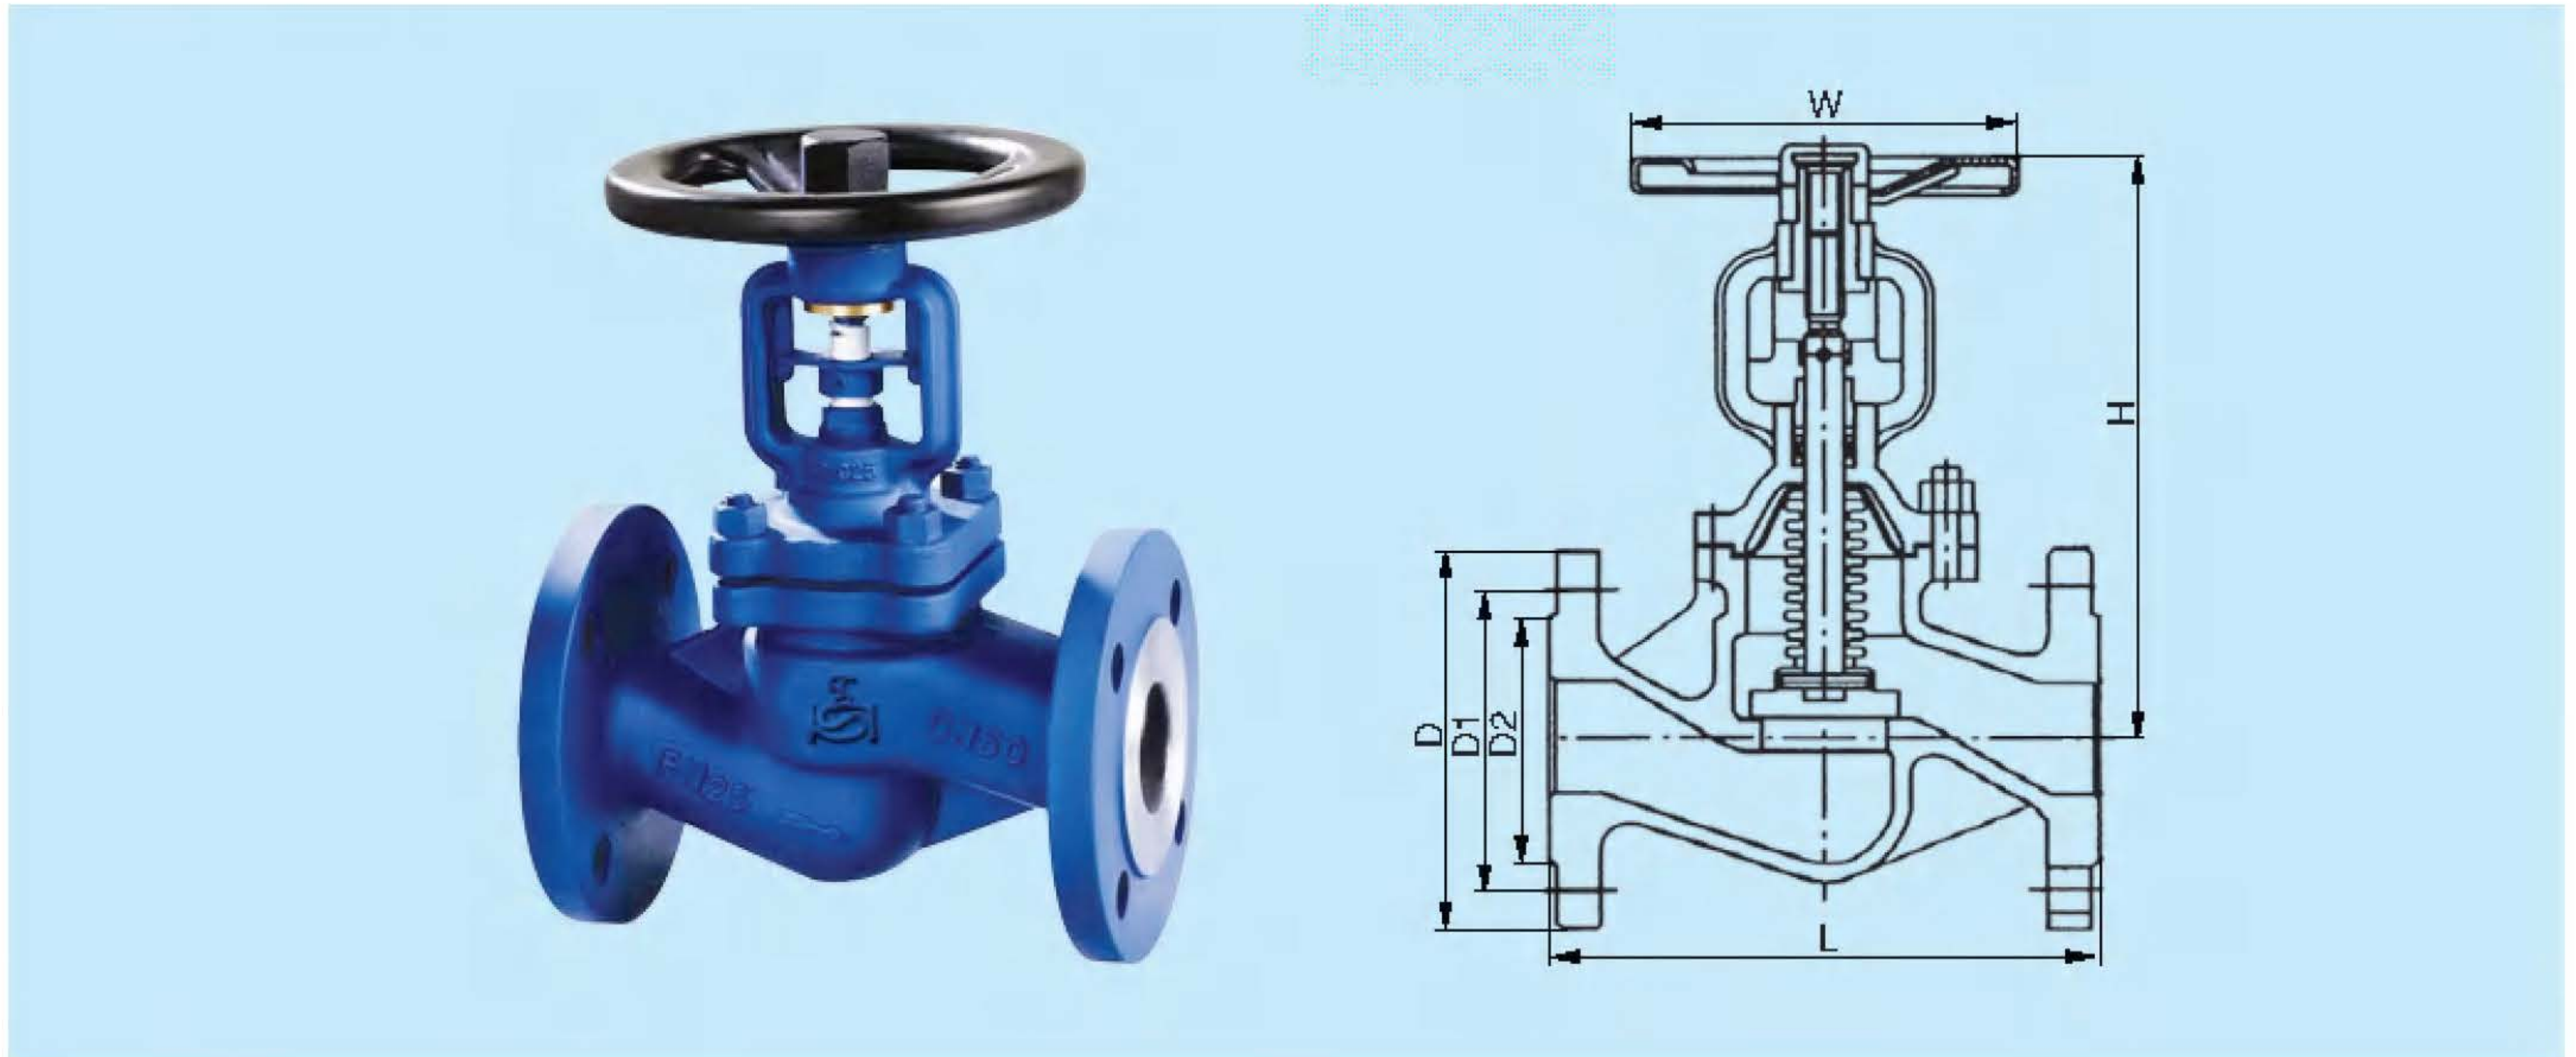


主要外形尺寸 (mm) Main External and Connection Dimension

型号 Type	DN	L	D	D1	D2	H	W
WJ41H/W -16C/P/R	15	130	95	65	45	181	140
	20	150	105	75	55	181	140
	25	160	115	85	65	195	160
	32	180	135	100	76	215	160
	40	200	145	110	85	220	180
	50	230	160	125	100	225	200
	65	290	180	145	120	260	200
	80	310	195	160	135	275	250
	100	350	215	180	155	335	300
	125	400	245	210	185	390	350
	150	480	280	240	210	405	350
	200	600	335	295	265	520	400
	250	730	405	355	320	610	500
	300	850	460	410	375	660	500
350	980	550	490	448	700	520	

主要外形尺寸 (mm) Main External and Connection Dimension

型号 Type	DN	L	D	D1	D2	H	W
WJ41H/W -25C/P/R	15	130	95	65	45	181	140
	20	150	105	75	55	181	140
	25	160	115	85	65	195	160
	32	180	135	100	78	215	160
	40	200	145	110	85	220	180
	50	230	160	125	100	225	200
	65	290	180	145	120	260	200
	80	310	195	160	135	275	250
	100	350	230	190	160	335	300
	125	400	270	220	188	390	350
	150	480	300	250	218	405	350
	200	600	360	310	278	520	400
	250	730	425	370	332	610	500
	300	850	485	430	390	660	500
350	980	550	490	448	700	520	
WJ41H/W -40C/P/R	15	130	95	65	45	181	160
	20	150	105	75	55	181	160
	25	160	115	85	65	195	180
	32	180	135	100	78	215	180
	40	200	145	110	85	220	200
	50	230	160	125	100	225	250
	65	290	180	145	120	260	250
	80	310	195	160	135	275	300
	100	350	230	190	160	335	350
	125	400	270	220	188	390	400
	150	480	300	250	218	405	400
	200	600	375	320	282	520	450
	250	730	445	385	345	610	520
	300	850	510	450	408	660	520
350	980	570	510	465	700	550	

波纹管截止阀

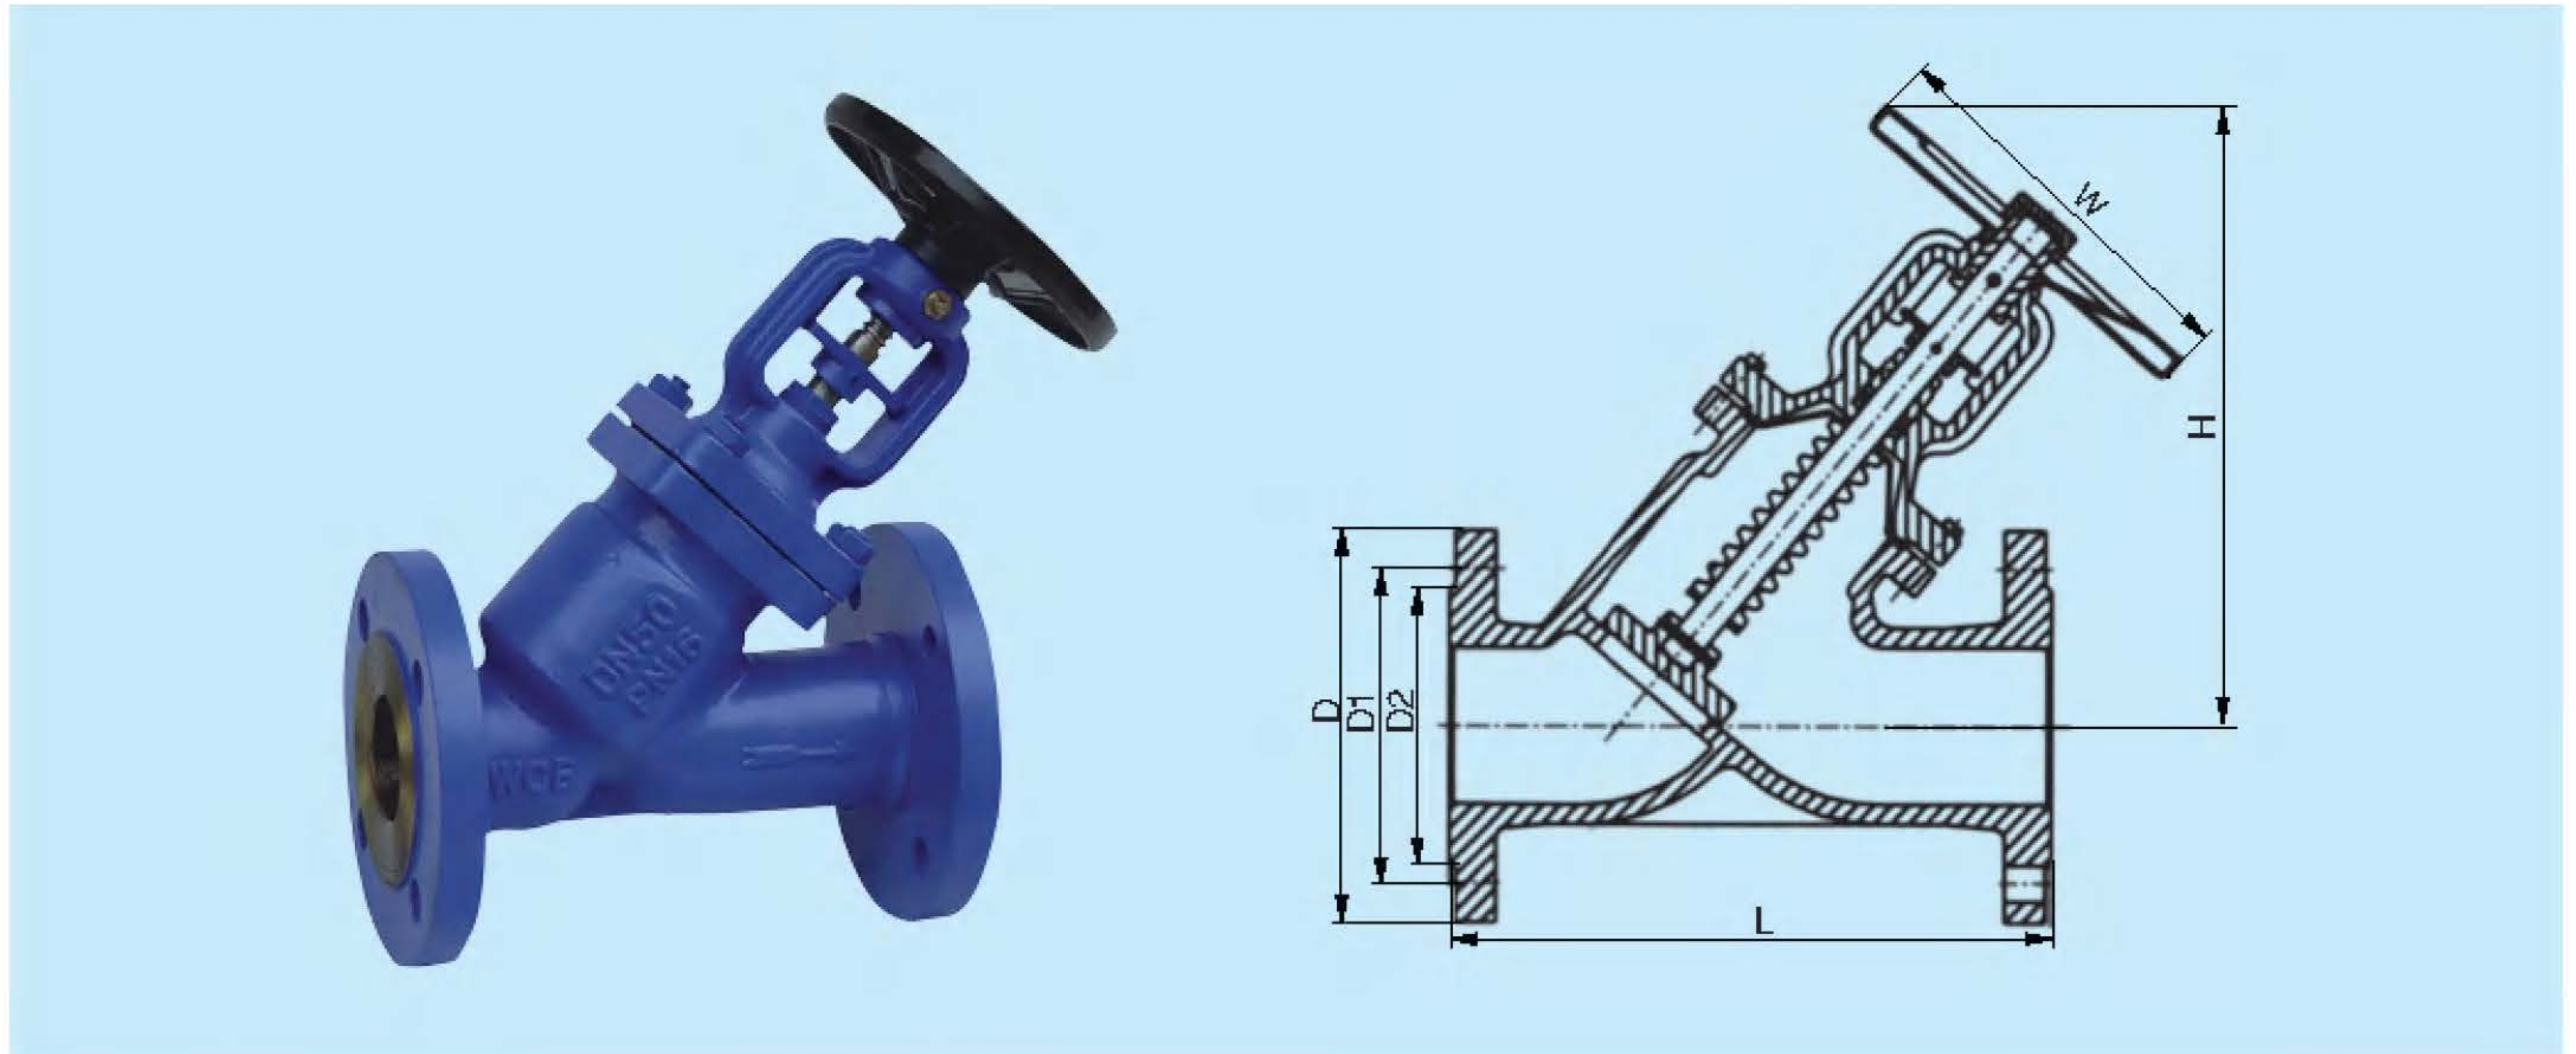

主要外形尺寸 (mm) Main External and Connection Dimension

型号 Type	DN	L	D	D1	D2	H	W
WJ45H/W -16C/P/R	15	130	95	65	45	185	120
	20	150	105	75	55	185	120
	25	160	115	85	65	195	140
	32	180	135	100	76	225	140
	40	200	145	110	85	230	160
	50	230	160	125	100	235	180
	65	290	180	145	120	250	180
	80	310	195	160	135	270	200
	100	350	215	180	155	345	250
	125	400	245	210	185	380	300
	150	480	280	240	210	435	300
200	600	335	295	265	600	400	

主要外形尺寸 (mm) Main External and Connection Dimension

型号 Type	DN	L	D	D1	D2	H	W
WJ45H/W -25C/P/R	15	130	95	65	45	185	120
	20	150	105	75	55	185	120
	25	160	115	85	65	195	140
	32	180	135	100	78	225	140
	40	200	145	110	85	230	160
	50	230	160	125	100	235	180
	65	290	180	145	120	250	180
	80	310	195	160	135	270	200
	100	350	230	190	160	345	250
	125	400	270	220	188	380	300
	150	480	300	250	218	435	300
	200	600	360	310	278	600	400
WJ45H/W -40C/P/R	15	130	95	65	45	185	140
	20	150	105	75	55	185	140
	25	160	115	85	65	195	140
	32	180	135	100	78	225	160
	40	200	145	110	85	230	180
	50	230	160	125	100	235	180
	65	290	180	145	120	250	200
	80	310	195	160	135	270	250
	100	350	230	190	160	345	300
	125	400	270	220	188	380	350
	150	480	300	250	218	435	350
	200	600	375	320	282	600	450