

对夹式、突耳式蝶阀



阀板旋转轴与阀座之间采用双偏心设计,当阀板旋转时,在凸轮的作用下它以一个很小的角度离开阀座,这一突出的特点可以实现长时间的气密关闭。大大减少阀座磨损,减少传统阀门经常遇到的扭矩峰问题。

Double eccentric design for between the valve shaft and seat, when disc rotate, under the action of the cam, with a very small angle away from the seat, A prominent characteristics can realize airtight for a long time, greatly reducing valve seat wear, reduces torque peak problems often encountered in traditional valve.

采用标准 Application standard


- | | |
|---------------------------------------|--|
| 1. 设计标准 :API 609、MSS.SP-68 | 1.Design standard: API609 MSS SP-68 |
| 2. 结构长度 :ASME B16.10、API609\MSS.SP-68 | 2.Structure length: ASME B16.10 API609 MSS SP-68 |
| 3. 连接法兰 :ASME B16.5、ASME B16.47 | 3. Connection flange: ASME B16.10 ASME B 16.47 |
| 4. 检验与试验 :API 598 | 4.Test and inspection: API 598 |

主要零件材料 The material of main parts

序号 No.	零件名称 Part name	材质 Material
1	阀体 Body	WCB、CF8、CF8M、CF3M
2	阀杆 Stem	1Cr13、2Cr13、1Cr18Ni1Ti、0Cr18Ni12Mo1Ti
3	蝶板组合件 Butterfly disc assembly	WCB+F4、WCB+ 不锈钢复合件 Composite stainless steel pieces WCB+F6、CF8、CF8M
4	填料垫 Packing mat	2Cr13、304(304L)、316(316L)
5	填料 Packing	柔性石墨 Flexible graphite
6	填料压盖 Packing gland	WCB、CF8、CF8M
7	支架 Bracket	WCB、CF8、CF8M、CF3、CF3M
8	蜗轮蜗杆装置 Worm gear device	QT200/QT400

注释 note: 可根据不同的介质选用不同的材质。
can choose different material according to different media.

对夹式、突耳式蝶阀

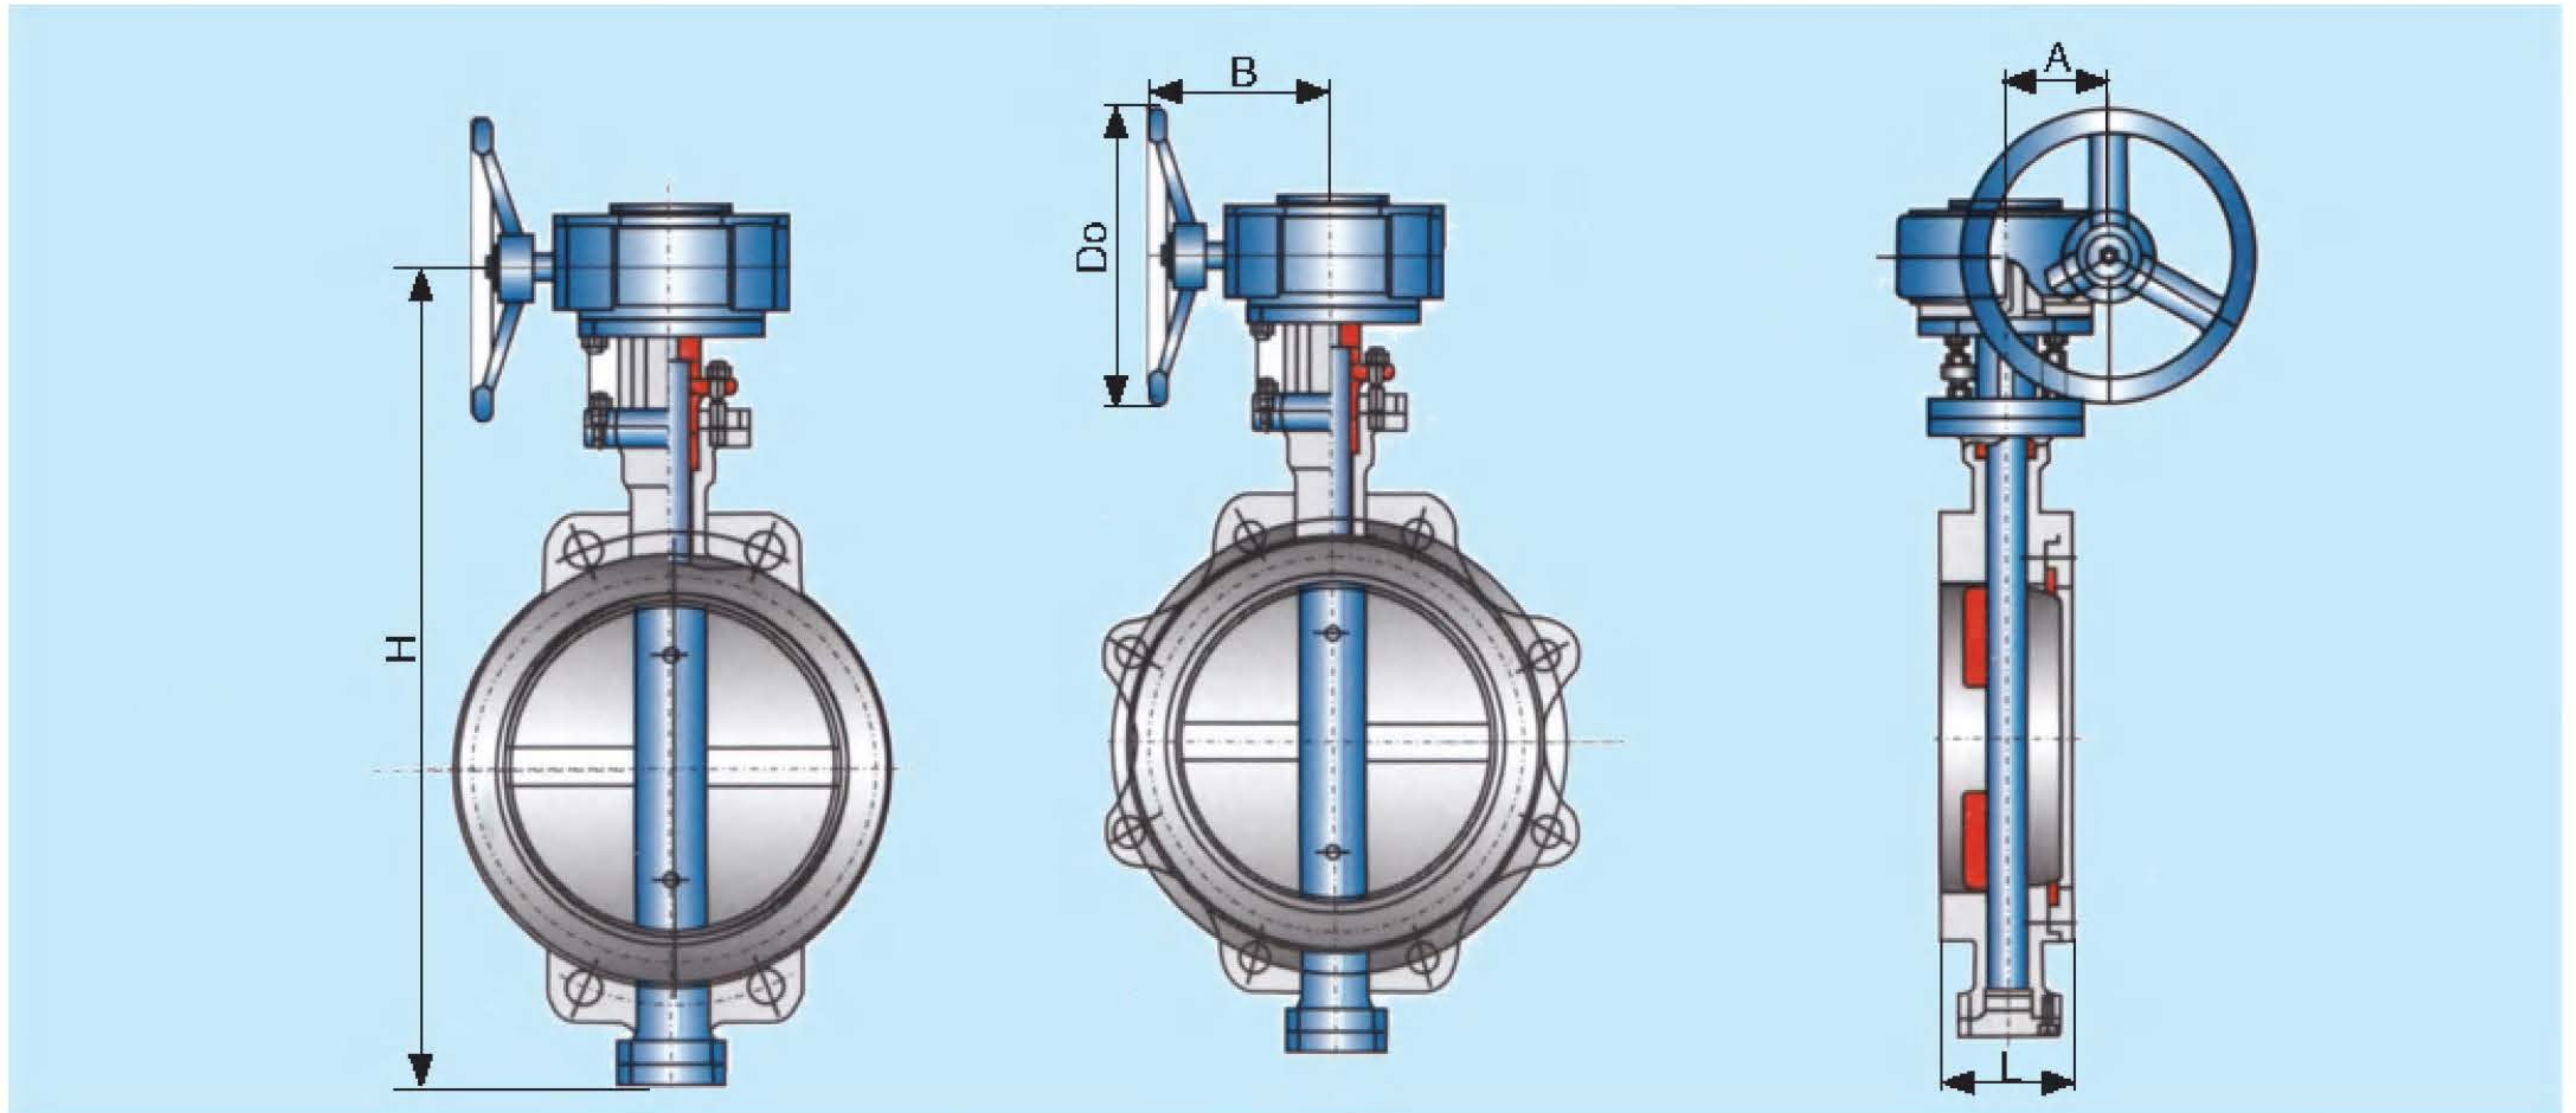

外形尺寸 Overall dimensions (mm) ANSI Class 150Lb

NPS	L	H	A	B	Do
3	48	380	140	63	160
4	54	420	140	63	160
5	55	460	140	63	300
6	57	555	140	63	300
8	64	780	150	84	400
10	71	840	150	84	400
12	81	995	200	108	600
14	92	1050	200	108	600
16	102	1220	240	152	600
18	114	1280	240	152	800
20	127	1365	300	168	800
24	154	1460	320	192	800
28	229	1520	237	168	400
32	241	1710	237	168	400
34	241	1810	237	168	400
40	300	1900	237	168	600

外形尺寸 Overall dimensions (mm) ANSI Class 300Lb

NPS	L	H	A	B	Do
3	48	380	140	63	300
4	54	420	140	63	400
5	55	460	140	63	400
6	59	555	150	84	600
8	73	780	150	84	600
10	83	840	200	108	600
12	92	995	200	108	800
14	117	1050	240	152	800
16	133	1220	300	168	800
18	149	1280	320	192	400
20	159	1365	168	237	400
24	181	1460	168	237	400

外形尺寸 Overall dimensions (mm) ANSI Class 600Lb

NPS	L	H	A	B	Do
3	54	395	140	63	400
4	64	430	140	63	600
5	70	475	200	108	600
6	78	570	240	152	600
8	102	800	300	168	800
10	117	865	320	192	800
12	140	1080	168	237	800
14	155	1210	168	237	400
16	178	1285	168	237	400