


浮动式法兰球阀

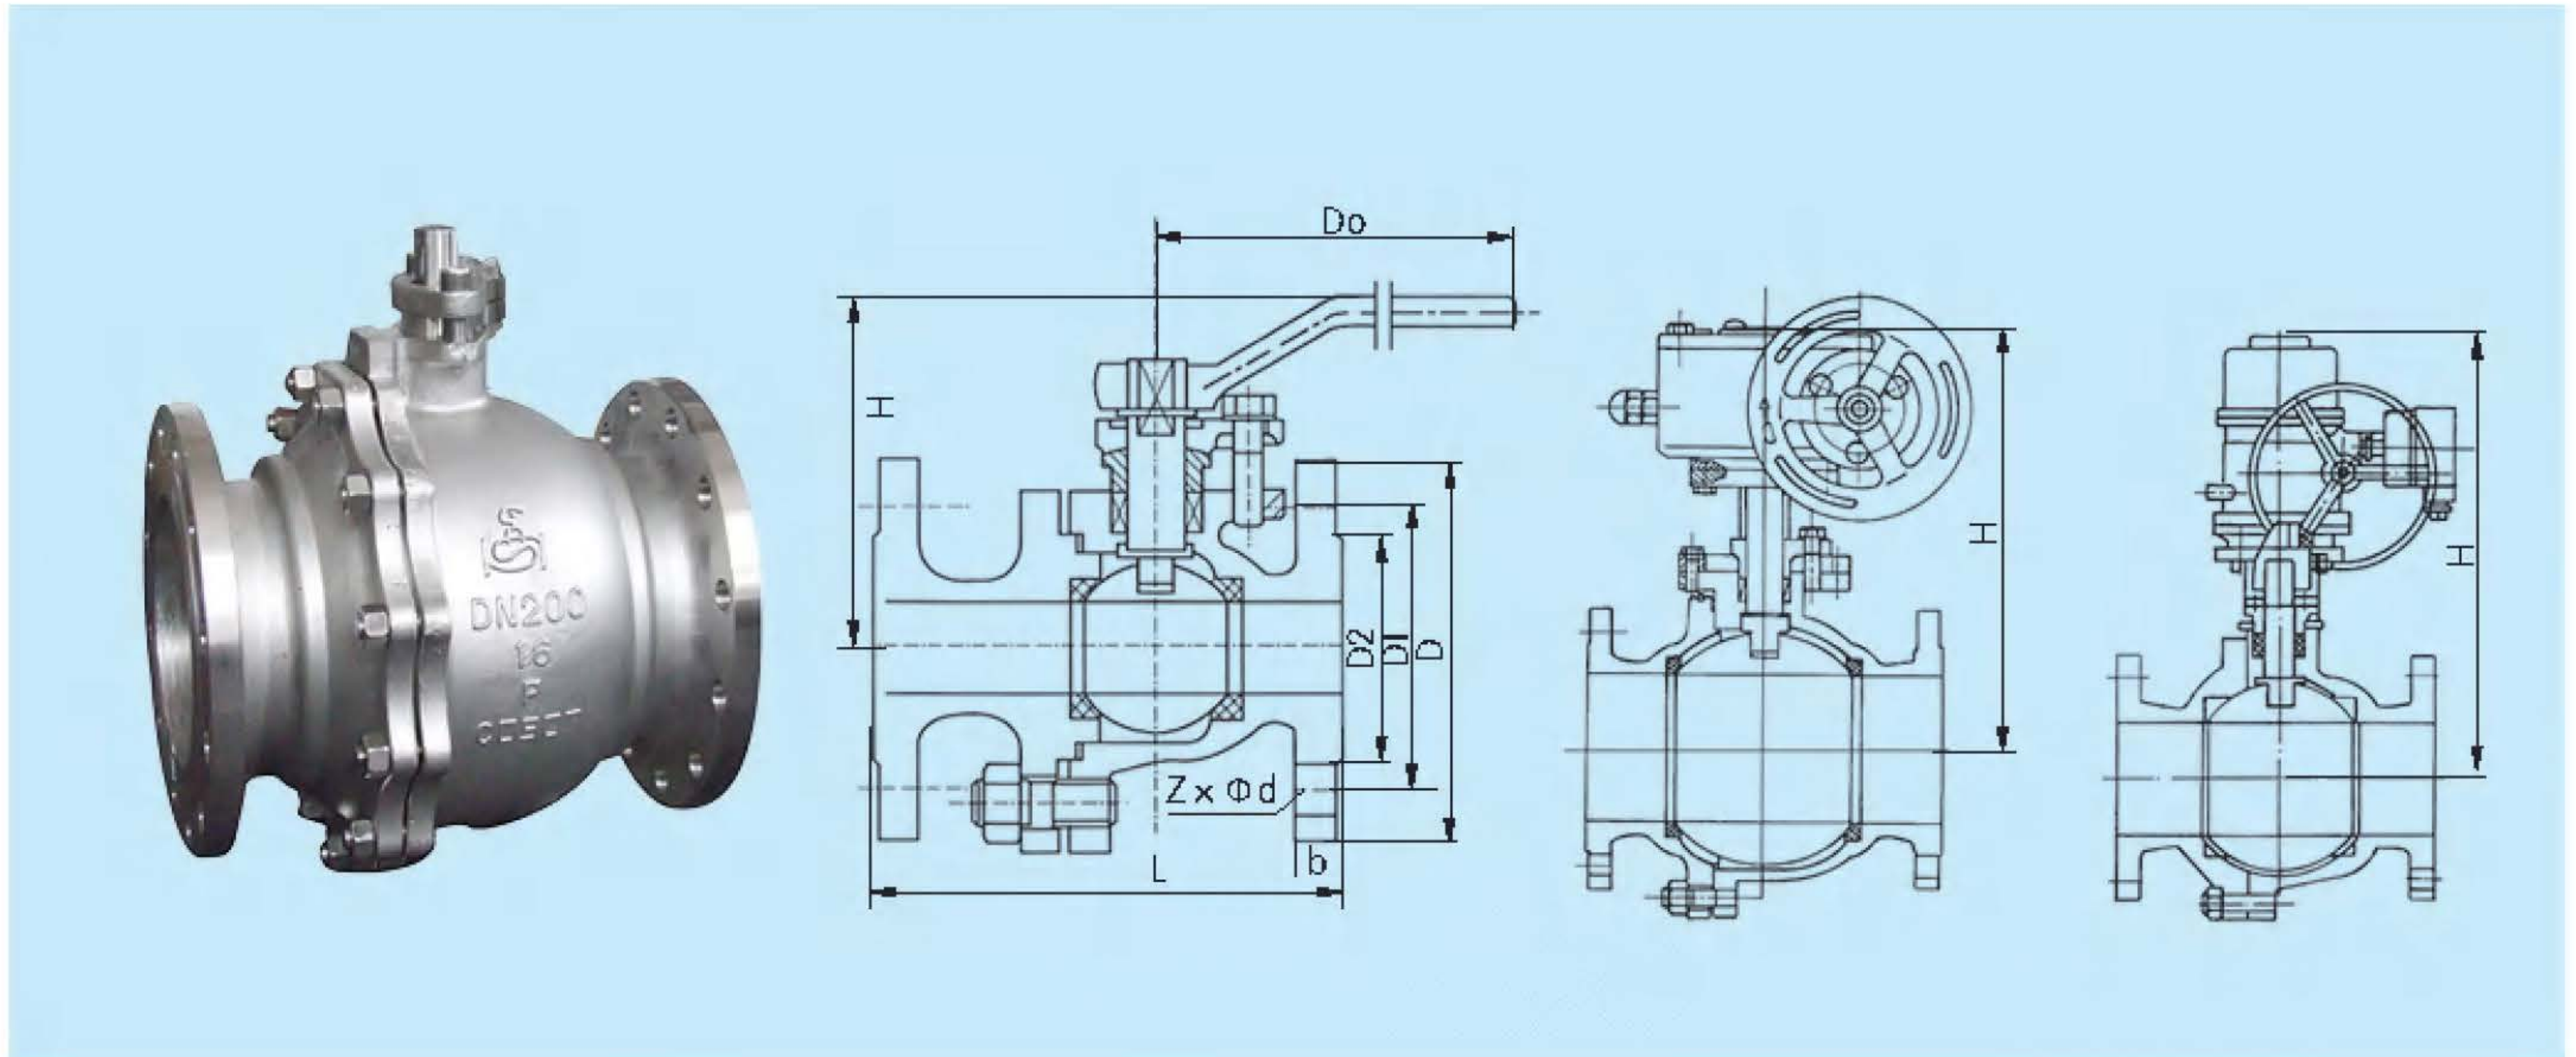

主要外形尺寸 (mm) Main External and Connection Dimension

型号 Type	DN	PN1.6MPa/PN2.5MPa								蜗轮 worm	电动 electric
		L	D	D1	D2	b	Z x Φd	L0	H	H	H
Q41F/H/Y Q341F/H/Y Q941F/H/Y -16C/P/R/I	15	130	95	65	45	14	4 x Φ14	120	75		
	20	140	105	75	55	14	4 x Φ14	130	84		
	25	150	115	85	65	14	4 x Φ14	150	90		
	32	165	135	100	78	16	4 x Φ18	190	107		
	40	180	145	110	85	16	4 x Φ18	220	127		
	50	200	160	125	100	16	4 x Φ18	230	140		472
	65	220	180	145	120	18	4 x Φ18	270	164		486
	80	250	195	160	135	20	8 x Φ18	300	177		579
	100	280	215	180	155	20	8 x Φ18	330	206		595
	125	320	245	210	185	22	8 x Φ18	600	292		650
	150	360	280	240	210	24	8 x Φ23	800	320	292	739
	200	400	335	295	265	26	12 x Φ23	1200	365	398	799
Q41F/H/Y Q341F/H/Y Q941F/H/Y -25P/R/I	15	130	95	65	45	16	4 x Φ14	120	75		
	20	140	105	75	55	16	4 x Φ14	130	84		
	25	150	115	85	65	16	4 x Φ14	150	90		
	32	165	135	100	78	18	4 x Φ18	190	107		
	40	180	145	110	85	18	4 x Φ18	220	127		
	50	200	160	125	100	20	4 x Φ18	230	140		472
	65	220	180	145	120	22	8 x Φ18	270	164		486
	80	250	195	160	135	22	8 x Φ18	300	177		579
	100	280	230	190	160	24	8 x Φ23	330	206		595
	125	320	270	220	188	28	8 x Φ25	600	292		650
	150	360	300	250	218	30	8 x Φ25	800	320	292	739
	200	400	360	310	278	34	12 x Φ25	1200	365	398	799

浮动式法兰球阀

主要外形尺寸 (mm) Main External and Connection Dimension

型号 Type	DN	PN4.0MPa/PN6.4MPa/PN10.0MPa								蜗轮 worm		电动 electric	
		L	D	D1	D2	b	Z × Φd	L0	H	H	LO	H	L0
Q41F/H/Y Q341F/H/Y Q941F/H/Y -40P/R/I	15	130	95	65	45	16	4 × Φ14	120	75				
	20	140	105	75	55	16	4 × Φ14	130	84				
	25	150	115	85	65	16	4 × Φ14	150	90				
	32	180	135	100	78	18	4 × Φ18	190	107				
	40	200	145	110	85	18	4 × Φ18	220	127				
	50	220	160	125	100	20	4 × Φ18	230	140			472	190
	65	250	180	145	120	22	8 × Φ18	270	164			486	190
	80	280	195	160	135	22	8 × Φ18	300	177			579	190
	100	320	230	190	160	24	8 × Φ23	330	206			595	190
	125	400	270	220	188	28	8 × Φ25	600	292			650	400
	150	400	300	250	218	30	8 × Φ25	800	320	292	400	739	400
200	502	375	320	282	38	12 × Φ30	1200	365	398	600	799	400	
Q41F/H/Y Q341F/H/Y Q941F/H/Y -64/P/R/I	15	140	105	75	55	18	4 × Φ14	130	80				
	20	152	125	90	68	20	4 × Φ18	150	89				
	25	180	135	100	78	22	4 × Φ18	190	95				
	32	200	150	110	82	24	4 × Φ23	220	112				
	40	220	165	125	95	24	4 × Φ23	230	132				
	50	250	175	135	105	26	4 × Φ23	270	145			472	400
	65	280	200	160	130	28	8 × Φ23	300	169			599	400
	80	320	210	170	140	30	8 × Φ23	330	182	292	400	599	400
	100	360	250	200	168	32	8 × Φ25	600	211	398	600	632	400
	125	381	295	240	202	36	8 × Φ34	800	302	400	800	650	400
	150	403	340	280	240	38	12 × Φ34	1200	330	430	800	710	400
Q41F/H/Y Q341F/H/Y Q941F/H/Y -100/P/R/I	15	165	105	75	46	20	4 × Φ14	130	75				
	20	190	130	90	56	20	4 × Φ18	170	84				
	25	216	140	100	65	24	4 × Φ18	170	90				
	32	229	155	110	76	24	4 × Φ22	200	107				
	40	241	170	125	84	26	4 × Φ22	250	127				
	50	292	195	145	99	28	4 × Φ26	250	140			472	400
	65	330	220	170	118	30	8 × Φ26	350	164			599	400
	80	356	230	180	132	32	8 × Φ26	350	177	292	400	599	400
	100	432	265	210	156	36	8 × Φ30	420	206	398	600	632	400
	125	508	315	250	184	40	8 × Φ33	700	292	400	800	650	400
	150	559	355	290	211	42	12 × Φ33	1000	320	430	800	710	400
	200	660	430	360	284	52	12 × Φ36	1300	365	480	800	472	400