


升降式止回阀

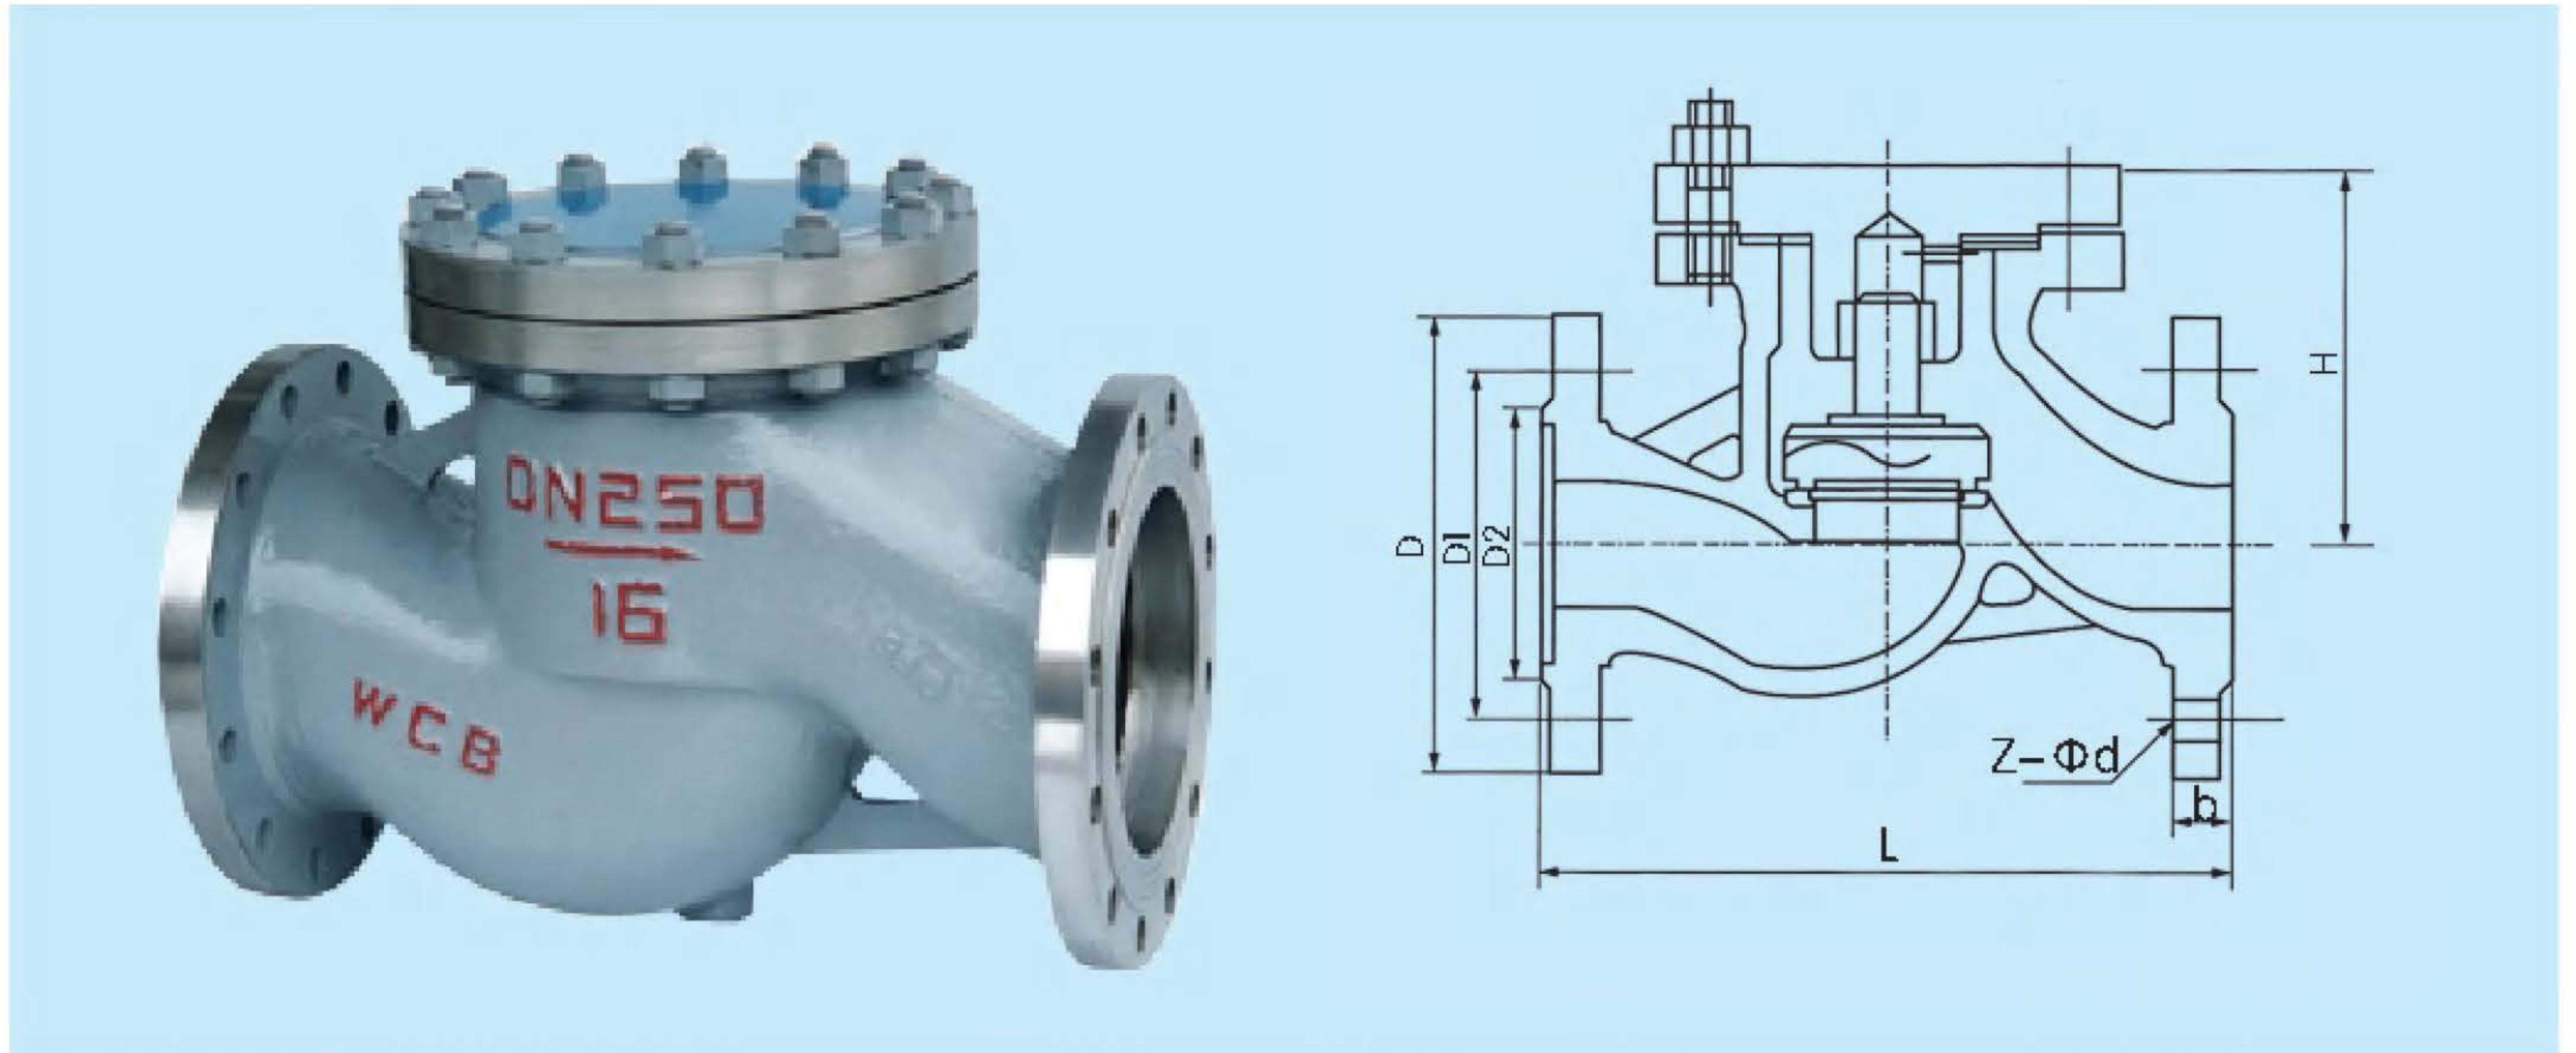

主要外形尺寸 (mm) Main External and Connection Dimension

型号 Type	DN	L	D	D1	D2	b	Z-Φd	H
H41H H41W H41Y -16C/P/R/I	15	130	95	65	45	16	4-Φ14	77
	20	150	105	75	55	16	4-Φ14	77
	25	160	115	85	65	16	4-Φ14	80
	32	180	135	100	78	18	4-Φ18	85
	40	200	145	110	85	18	4-Φ18	95
	50	230	160	125	100	20	4-Φ18	105
	65	290	180	145	120	22	8-Φ18	120
	80	310	195	160	135	22	8-Φ18	130
	100	350	230	190	160	24	8-Φ18	140
	125	400	270	220	180	28	8-Φ18	155
	150	480	300	250	218	30	8-Φ23	180
	200	600	360	310	278	34	12-Φ23	215
	250	730	425	370	332	36	12-Φ25	260
	300	850	485	430	390	40	12-Φ25	315
H41H H41W H41Y -25P/R/I	15	130	95	65	45	16	4-Φ14	100
	20	150	105	75	55	16	4-Φ14	105
	25	160	115	85	65	16	4-Φ14	120
	32	180	135	100	78	18	4-Φ18	130
	40	200	145	110	85	18	4-Φ18	135
	50	230	160	125	100	20	4-Φ18	149
	65	290	180	145	120	22	8-Φ18	160
	80	310	195	160	135	22	8-Φ18	169
	100	350	230	190	160	24	8-Φ23	194
	125	400	270	220	180	28	8-Φ25	222
	150	480	300	250	218	30	8-Φ25	255
	200	600	360	310	278	34	12-Φ25	305
	250	730	425	370	332	36	12-Φ30	355
	300	850	485	430	390	40	16-Φ30	410

升降式止回阀

主要外形尺寸 (mm) Main External and Connection Dimension

型号 Type	DN	L	D	D1	D2	b	Z-Φd	H
H41H H41W H41Y -40P/R/I	15	130	95	65	45	16	4-Φ14	100
	20	150	105	75	55	16	4-Φ14	105
	25	160	115	85	65	16	4-Φ14	120
	32	180	135	100	78	18	4-Φ18	130
	40	200	145	110	85	18	4-Φ18	135
	50	230	160	125	100	20	4-Φ18	149
	65	290	180	145	120	22	8-Φ18	160
	80	310	195	160	135	22	8-Φ18	169
	100	350	230	190	160	24	8-Φ23	194
	125	400	270	220	188	28	8-Φ25	225
	150	480	300	250	218	30	8-Φ25	255
	200	600	375	320	282	38	12-Φ30	305
	250	730	445	385	345	42	12-Φ34	360
	300	850	510	450	408	46	12-Φ34	415
H41H H41W H41Y -64P/R/I	15	210	105	75	55	18	4-Φ14	100
	20	230	125	90	68	20	4-Φ18	110
	25	230	135	100	78	22	4-Φ18	125
	32	260	150	110	82	24	4-Φ23	140
	40	260	165	125	95	24	4-Φ23	168
	50	300	175	135	105	26	4-Φ23	170
	65	340	200	160	130	28	8-Φ23	188
	80	380	210	170	140	30	8-Φ23	205
	100	430	250	200	168	32	8-Φ25	230
	125	500	295	240	202	36	8-Φ30	230
	150	550	340	280	240	38	8-Φ34	265
	200	650	405	345	300	44	12-Φ34	310
H41H H41W H41Y -100P/R/I	15	170	105	75	55	20	4-Φ14	100
	20	190	125	90	68	22	4-Φ18	110
	25	210	135	100	78	24	4-Φ18	125
	32	230	150	110	82	24	4-Φ23	140
	40	260	165	125	95	26	4-Φ23	170
	50	300	195	145	112	28	4-Φ25	185
	65	340	220	170	138	32	8-Φ25	200
	80	380	230	180	148	34	8-Φ25	235
	100	430	265	210	172	38	8-Φ30	265
	125	500	310	250	210	42	8-Φ34	280
	150	550	350	290	250	46	12-Φ34	300
	200	650	430	360	312	54	12-Φ41	330